


Power Rating vs Frequency

Rating stated for 25°C ambient temperature, matched 50 ohm system sea level and cold switching.

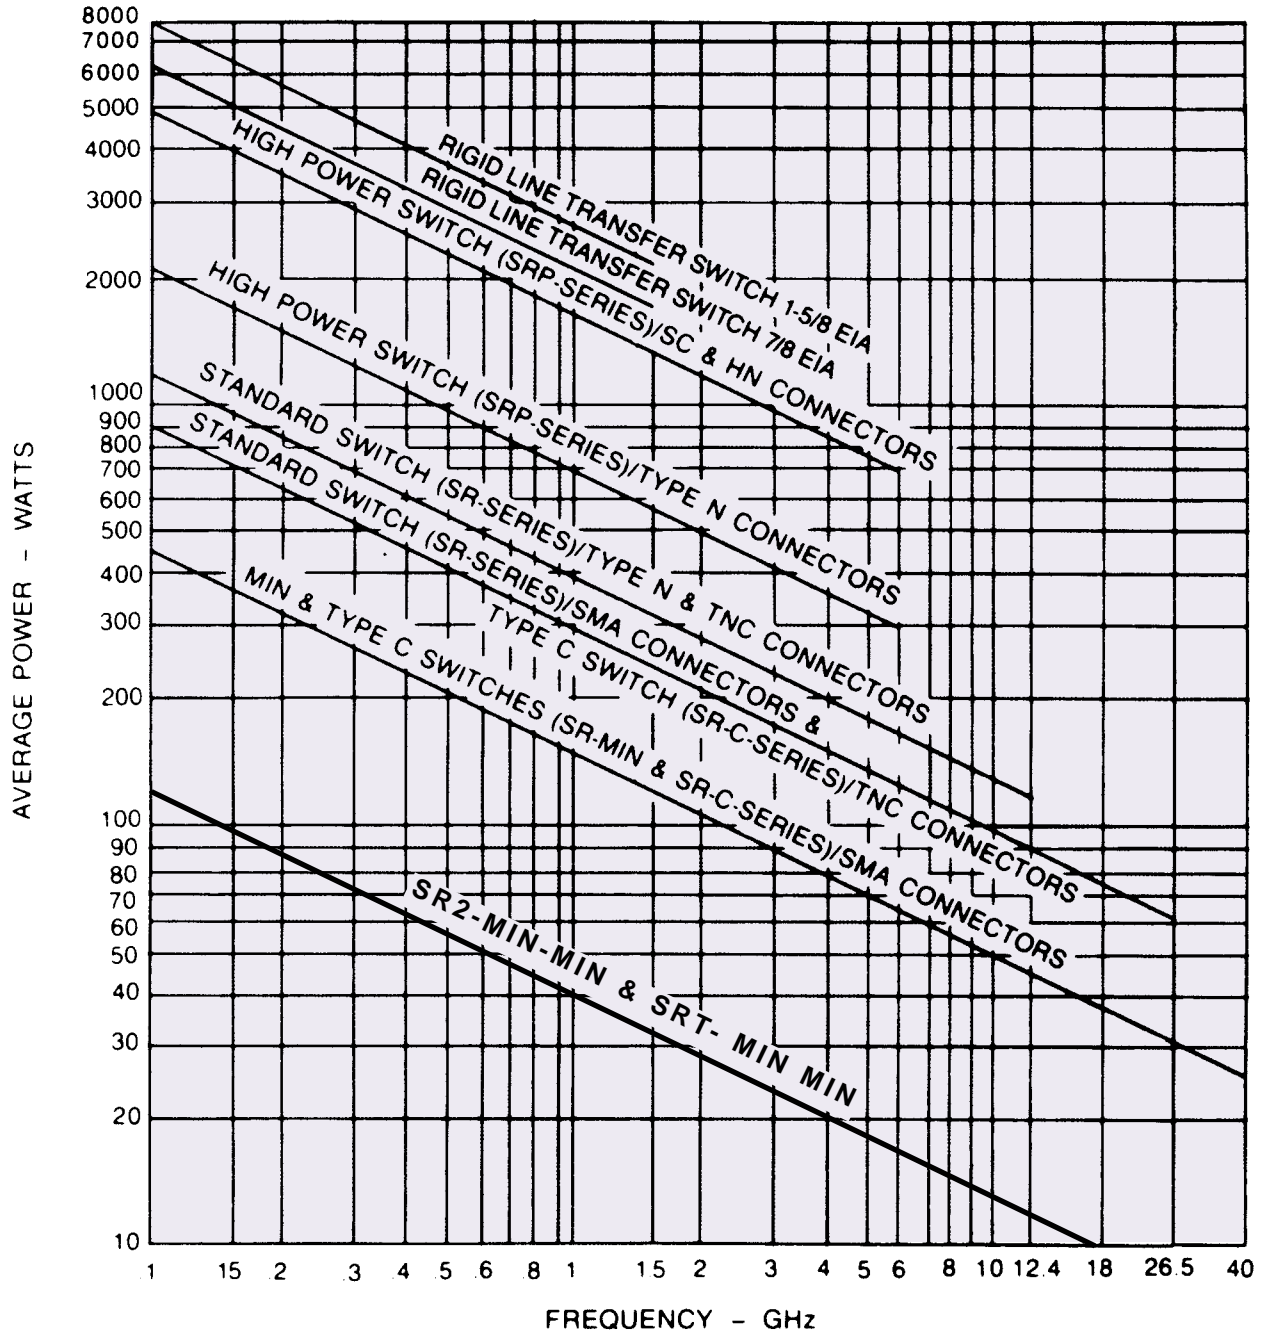

Power level ratings are given for switches equipped with temperature construction (which must be specified when

maximum power handling capacity is required). Standard switches should be derated to 75% of indicated values.



RLC ELECTRONICS, INC.

83 Radio Circle, Mount Kisco, New York 10549 • Telephone: 914-241-1334 • Fax: 914-241-1753
 e-mail: sales@rlcelectronics.com • www.rlcelectronics.com